

**Encon**<sup>®</sup>  
SAFETY PRODUCTS

1-800-283-6266

Phone: (713) 466-1449 Fax: (713) 466-1703  
E-Mail: customerservice@enconsafety.com



# COMBINATION SHOWER/ EYEWASH WITH PVC PIPING AND YELLO-BOWL<sup>®</sup>

PART NUMBER: 01060007

**SPECIFICATION:**

Third party certified to ANSI Z358.1, the combination shower and eyewash shall deliver 30 gpm (113.6 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure from the shower head and 3.2 gpm (12.1 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure from the eyewash. Combination unit shall provide a non-injurious flow of water for 15 minutes or longer. Unit shall be supplied with corrosion resistant Polane<sup>®</sup> coated bronze single motion activation stay open ball valves with CP balls. Valve sizes: shower 1 1/2", eyewash 1/2". Unit shall include SS actuators with actuation graphics, 1 1/2" schedule 80 corrosion resistant PVC piping and 1 1/2" supply/waste connection with flanged floor mounting plate for floor/wall supported installation. Shower head shall be supplied with self-adjusting 30 gpm (113.6 lpm) regulator. Eyewash to be supplied with 3.2 gpm (12.1 lpm) regulator to assure a constant and even dual stream flow pattern under 30/70 psi (206.8/482.6 kPa) hydraulic conditions. Shower head to be manufactured of UV resistant high visibility yellow ABS plastic to deliver a minimum of 20" (50.8 cm) diameter pattern to the target area 60" (152.4 cm) above standing level. Eyewash heads with float off covers to be manufactured of UV resistant ABS plastic mounted in a high visibility Yello-Bowl<sup>®</sup>. Eyewash float off covers are secured with stainless steel bead chains and provided to inhibit dust and/or contamination when not in use. Combination units that provide improper flow pattern or contain deteriorating screens/filters are not acceptable. Combination unit shall be Encon Safety Products Model 01060007.

**MATERIALS OF CONSTRUCTION:**

**PIPING:** Schedule 80 corrosion resistant PVC piping and socket weld joints.

**VALVES:** Polane<sup>®</sup> coated bronze stay open ball valves with chrome plated ball, stainless steel valve stems, stainless steel push plate with actuation graphic (eyewash) and stainless steel pull rod assembly with actuation graphic (shower).

**SHOWER HEAD:** Yellow ABS plastic shower head.

**EYEWASH HEAD:** ABS plastic dual stream heads with ABS plastic float off covers secured with stainless steel bead chains.


**BOWL:** High visibility ABS plastic Yello-Bowl<sup>®</sup>.

**REGULATOR:** Self-adjusting 30 gpm (113.6 lpm) shower and 3.2 gpm (12.1 lpm) eyewash regulators.

**SUPPLY:** 1 1/2" NPT

**WASTE:** 1 1/2" NPT

**WEIGHT:** 34 lbs (15.42 kgs)

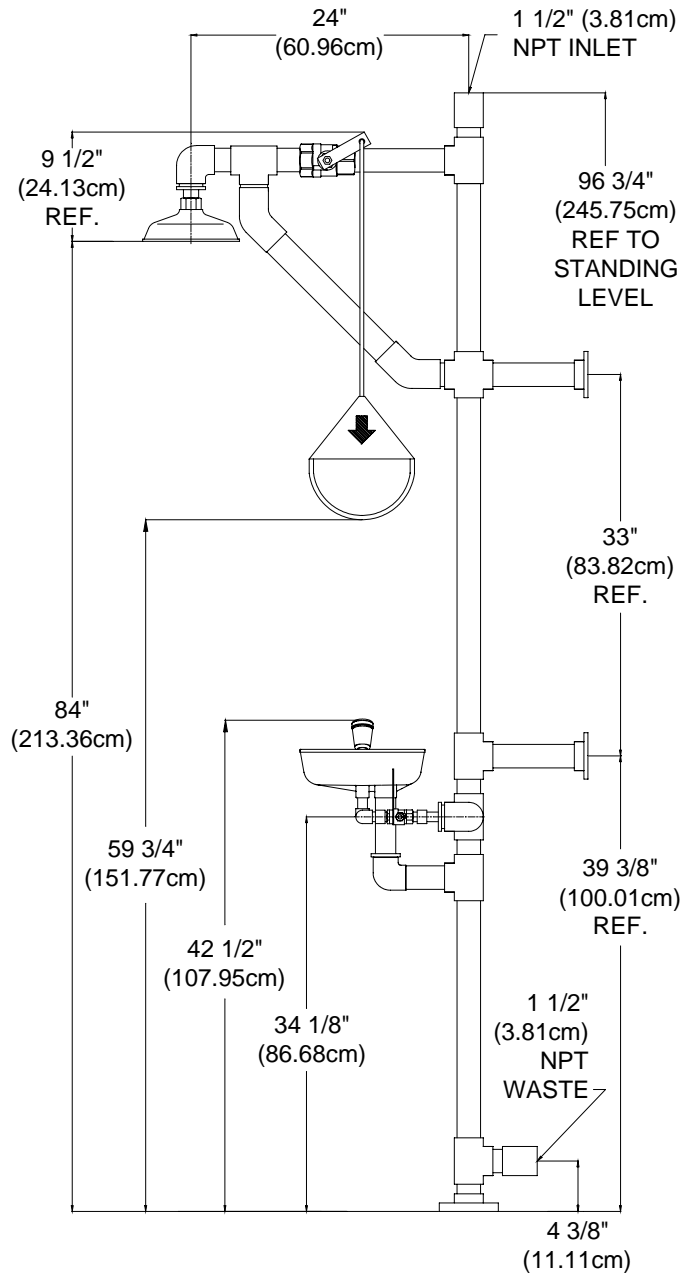

MODEL #	DESCRIPTION
01060007	Unit as Specified

Polane<sup>®</sup> is polyurethane enamel and a registered trademark of Sherwin Williams.