

Phone: (713) 466-1449 Fax: (713) 466-1703 E-Mail: customerservice@enconsafety.com

## EYEWASH WITH YELLO-BOWL® PART NUMBER: 01030301

## **SPECIFICATION:**

Third party certified to ANSI Z358.1, the eyewash shall deliver 3.2 gpm (12.1 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure. Eyewash shall provide a noninjurious stream of water for 15 minutes or. Unit shall be supplied with ½" chrome plated (CP) single motion activation stay open ball valve with CP ball. Eyewash shall include S/S actuator with actuation graphic, 7" X 11" (17.8cm X 27.9cm) sign and tailpiece. Unit must be supplied with self-adjusting 3.2 gpm (12.1 lpm) regulator to assure a constant and even dual stream flow pattern under 30/70 psi (206.8/482.6 kPa) hydraulic conditions. Eyewash heads with float off covers to be manufactured of UV resistant ABS plastic mounted in a high visibility ABS plastic Yello-Bowl®. Float off covers are secured with stainless steel bead chains and provided to inhibit dust and/or contamination when not in use. Eyewash units that provide improper flow pattern or contain deteriorating screens/filters are not acceptable. Eyewash shall be Encon Safety Products Model 01030301.

## MATERIALS OF CONSTRUCTION:

**PIPING:** ½" Chrome plated brass.

**VALVES:** ½" Chrome plated bronze stay open ball valve with chrome plated ball, stainless steel valve stem and stainless steel push plate with actuation graphic.

**HEAD:** ABS plastic dual stream heads with ABS plastic float off covers secured with stainless steel bead chains.

**BOWL:** High visibility ABS plastic Yello-Bowl<sup>®</sup>.

**REGULATOR:** Self-adjusting 3.2 gpm (12.1 lpm) regulator.


SUPPLY: ½" NPT


**WASTE:** 1 ¼" x 6" (3.17cm X 15.24cm) long slip joint

tailpiece.

**WEIGHT:** 4 lbs (1.81 kgs)

MODEL#	DESCRIPTION
01030301	Unit as Specified

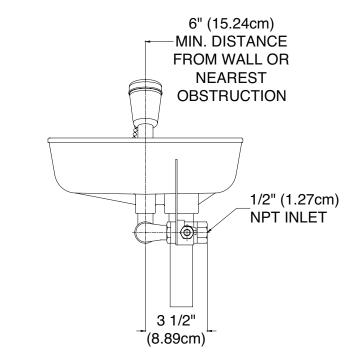

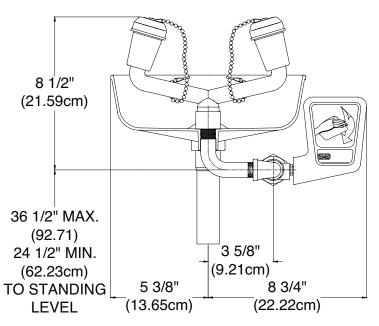

Doc. No: 01030301.2 Issue Date: 06/01/04 Sec: Eyewashes