





The Clear Choice

We designed the Helios® Emergency Eyewash Station to meet the needs of facilities of all sizes. Shops with space constraints previously only kept eye-flushing bottles due to space limitations; Helios® allows them to upgrade to a self-contained eyewash station that meets ANSI requirements for a 15-minute eyewash. Helios® sports an extremely slender profile that allows for a simple installation and use in small areas or narrow hallways close to facility hazards.

"The newest advancement in gravity fed eyewash stations on the market today"

The rounded and angled external surfaces were incorporated to reduce potential contaminant build up on the quipment while the recessed eyewash head insets on the vessel protecting the nozzels and helping to keep them clean. Helios® uses an innovative internal rotating actuation valve that eliminates the pinch tube/hose assembly for durability and flow control.

- Helios® delivers continuous noninjurious flushing fluid flow at a rate exceeding the ANSI/ISEA Z358.1-2014 standard requirement of 0.4 gpm (1.5 lpm) for a full 15 minutes.
- Helios® is easy to maintain and can be installed in small areas or narrow hallways that are close to facility hazards due to it's innovative slender profile.
- The fluid is stored in a small selfcontained 9.4 gallon (35.6 liters) tank.









Easy Installation • The light weight, compact design

- The light weight, compact design provides for one person installation
- Contains a built-in bracket on the back of the product for multiple mounting options – wall, column and cart
- No external parts necessary to assemble or install

Construction

Tank

• High visibility yellow polyethylene

Valve

- Internal, rotating ABS actuating valve integral to the eye wash tray
- Delivers stream of water at 0.4gpm (1.51lpm) for full fifteen minutes or longer
- Self-draining

Head


• ABS plastic dual stream heads inset directly into the eyewash tray

Water Treatment Additive

- Single bottle of Hydrosep® potable water preservative shipped with each unit
- Bottle treats fluids for 90 minimum days

Weight

- 9 lb w/out water/additive
- 87 lb (39.5 Kg) full use weight (with flushing fluid)
- 9.4 gallons of usable flushing fluid

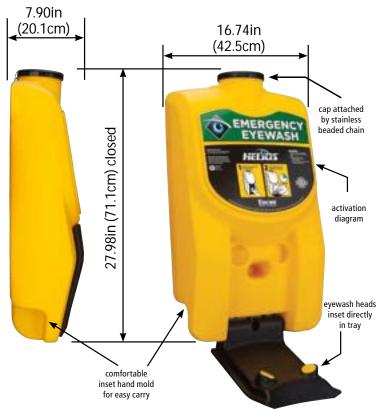

Model	Description
HE100	Self-contained gravity fed eyewash station
HS100	Self-contained gravity fed eyewash station, Spanish text
HF100	Self-contained gravity fed eyewash station, French-Canadian text
01110302	Metal cart for mounting and transporting a Helio's unit and recepetical.
01110764	Hydrosep® water additive - 4pk



6825 W. Sam Houston Pkwy. North Houston, TX 77041 www.enconsafety.com 1-800-283-6266 customerservice@enconsafety.com