



1-800-283-6266

Phone: (713) 466-1449 Fax: (713) 466-1703  
E-Mail: customerservice@enconsafety.com

# OVERHEAD MOUNTED SHOWER


PART NUMBER: 01052502

**SPECIFICATION:**

Third party certified to ANSI Z358.1, the shower shall deliver 30 gpm (113.6 lpm) @ 30/70 psi (206.8/482.6 kPa) of flowing pressure. Unit shall provide a non-injurious stream of water for 15 minutes or longer. Unit shall be supplied with 1" chrome plated (CP) bronze single motion activation stay open ball valve with CP ball, SS actuator with actuation graphic, and 1" supply connection. Shower head shall be supplied with self-adjusting 30 gpm (113.6 lpm) regulator to assure a constant flow and pattern under 30/70 psi (206.8/482.6 kPa) hydraulic conditions. Shower head to be manufactured of UV resistant high visibility yellow ABS plastic. Shower head must deliver a minimum of 20" (50.8 cm) diameter pattern to the target area 60" (152.4 cm) above standing level. Shower units that provide improper flow pattern are not acceptable. Shower unit shall be Encon Safety Products Model 01052502. For 20 gpm (75.7 lpm) showerhead, unit shall be Encon Safety Products Model 01052524. If type 304 SS head required, unit shall be Encon Safety Products Model 01052502SS. If type 304 SS valve required, unit shall be Encon Safety Products Model 01052531.

**MATERIALS OF CONSTRUCTION:**

- PIPING:** Schedule 80 hot dip galvanized steel.
- VALVES:** 1" chrome plated bronze stay open ball valve with chrome plated ball, stainless steel valve stem and stainless steel pull rod assembly with actuation graphic.
- SHOWERHEAD:** Yellow ABS plastic shower head.
- REGULATOR:** Self-adjusting 30 gpm (113.6 lpm) regulator.
- SUPPLY:** 1" NPT
- WEIGHT:** 6 lbs (2.72 kgs)

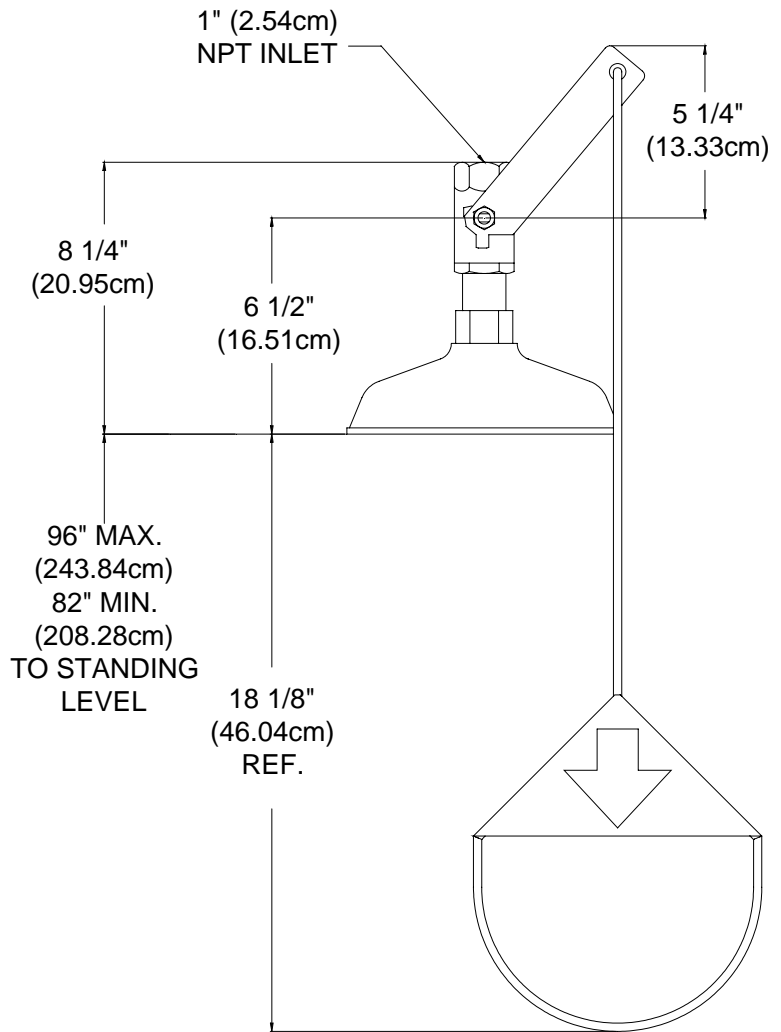

MODEL #	DESCRIPTION
01052502	As Specified
01052524	With 20 gpm shower head
01052502SS	With 304 S/S shower head
01052531	With 304 S/S valve